

LI0480 | ATTRACT BASE | MATT 80

UNCOATED SURFACE-TREATED PAPER

LABEL PRINTING

PRODUCT SPECIFICATION *

Weight DIN EN ISO 536	g/m ²	80	± 6
Thickness DIN EN ISO 534	µm	108	± 6
	mil	4.3	± 0.2
CIE whiteness (D65/10°) min. ISO 2469		> 157	
Opacity min. ISO 2469	%	> 90	

Printability

Duplex printable

Printing Technology

- ◆ Inkjet water-based dye
- ◆ Inkjet water-based pigment

Certificates

FSC® mix credit (available on request)

BENEFITS AND PROPERTIES


- › Good line sharpness
- › High colour consistency
- › Excellent runability
- › Cost-effective
- › FSC® mix credit (available on request)

KEY APPLICATIONS

Label printing

- › Home and personal care: cosmetic products
- › Transport and logistics: shipping, barcode, tracking
- › Food packaging
- › Wine, spirits, craft beverages
- › Retail: packaging, shelf marking, coupon
- › Healthcare and pharmaceuticals: laboratory, nutraceuticals
- › Office: organisation

PRODUCT STRUCTURE

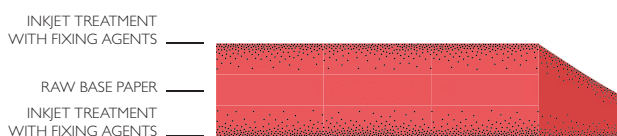

Directions for use

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

* Modifications reserved.

Version 10/2020

