

L73606 | ATTRACT ENDURING | LUSTRE 135

RESIN-COATED PAPER WITH PRIMER

LABEL PRINTING

PRODUCT SPECIFICATION *

Weight DIN EN ISO 536	g/m ²	142	± 6
Thickness DIN EN ISO 534	µm	137	± 6
	mil	5.4	± 0.23
Gloss BYK (60°) ISO 2813		30	± 5
CIE whiteness (D65/10°) min. ISO 2469		> 100	
Opacity min. ISO 2469	%	> 94	

Printability

Duplex printable

Printing Technology

- Indigo systems
- Dry toner systems
- Inkjet UV systems

Certificates

FSC® mix credit (available on request)

BENEFITS AND PROPERTIES


- › Look and feel of photo paper
- › Excellent toner adhesion
- › Water and dirt resistance without need for lamination
- › High whiteness
- › High ageing resistance
- › Excellent runability and finishing
- › Outstanding hot foil stamping properties
- › FSC® Mix Credit (available on request)

KEY APPLICATIONS

Label printing

- › Home and personal care: cosmetic products
- › Transport and logistics: shipping, barcode, tracking
- › Food packaging
- › Wine, spirits, craft beverages
- › Retail: packaging, shelf marking, coupon, promotions
- › Healthcare and pharmaceuticals: laboratory, nutraceuticals
- › Office: organisation

PRODUCT STRUCTURE

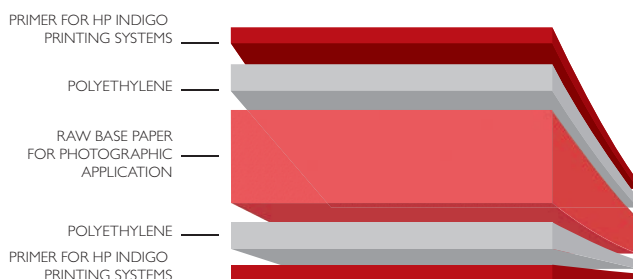

Directions for use

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

* Modifications reserved.

Version 03/2020

