

# L80406 | ATTRACT ENDURING | SATIN 80

RESIN-COATED PAPER WITH PRIMER

## LABEL PRINTING

### PRODUCT SPECIFICATION \*

<b>Weight</b> DIN EN ISO 536	g/m <sup>2</sup>	78	± 6
<b>Thickness</b> DIN EN ISO 534	µm	90	± 6
	mil	3.54	± 0.2
<b>Opacity min.</b> ISO 2469	%	> 70	

#### Printability

Simplex printable

#### Printing Technology

- Indigo systems
- ◆ Inkjet UV systems

#### Certificates

FSC® mix credit (available on request)

### BENEFITS AND PROPERTIES


- › Look and feel of photo paper
- › Excellent toner adhesion
- › Water and dirt resistance without need for lamination
- › High whiteness
- › High ageing resistance
- › Excellent runability and finishing
- › Outstanding hot foil stamping properties
- › 75% paper based
- › FSC® Mix Credit (available on request)

### KEY APPLICATIONS

#### Label printing

- › Home and personal care: cosmetic products
- › Transport and logistics: shipping, barcode, tracking
- › Food packaging
- › Wine, spirits, craft beverages
- › Retail: packaging, shelf marking, coupon, promotions
- › Healthcare and pharmaceuticals: laboratory, nutraceuticals
- › Office: organisation

### PRODUCT STRUCTURE

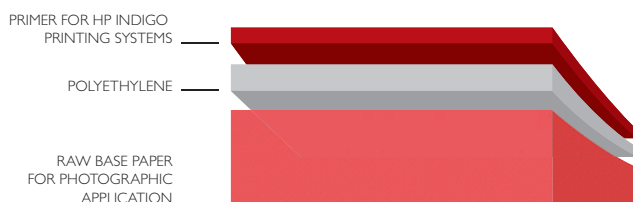

#### Directions for use

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

\* Modifications reserved.

Version 03/2020

